





# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

### REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数	UL1059			
UL/CUL Technical Data				
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	150	-	-	
额定电流 Rated Current [A]	5	-	-	
接线范围 Wire Range	26-20			
单/多芯线 Solid/Stranded [AWG]				
耐电压 Withstanding Voltage	1300V/1Min			
IEC 技术参数				
IEC Technical Data				
过电压类别 Overvoltage Category	III	III	II	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage [V]	100	160	320	
额定电流 Rated Current [A]	5	5	5	
额定冲击电压 Impulse withstand voltage [KV]	1.5	2.5	2.5	
导线截面积 Conductor cross section	0.2-0.5			
硬质/柔性导线 Solid/flexible [mm <sup>2</sup> ]				
材料 Material				
绝缘材料 Insulation Material	PA			
阻燃等级 Imflammability	UL94V-0			
导体材料 Contactor Material	铜合金 Copper alloy			
导体镀层 Contactive Coating	镀锡 Sn Plated			
一般参数 Other Data				
间距 Pitch [mm]	2.54			
极数 Poles [P]	02-24			
剥线长度 Stripping Length [mm]	5-6			
螺丝 Screw	M1.6			
扭矩 Torque(Max) [N.m]	0.1			
工作温度 Operating temperature [°C]	-40~105			

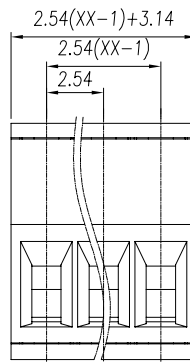

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	3:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称/TITLE <b>WJ15EDGK-2.54-XXP-1YY-00A</b>		