



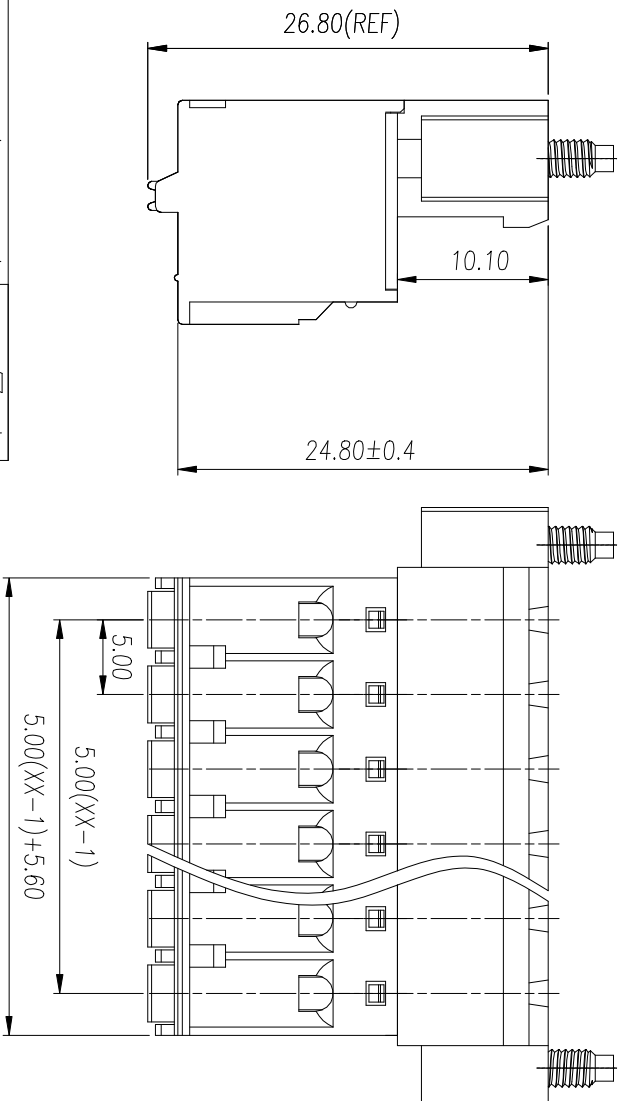

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE

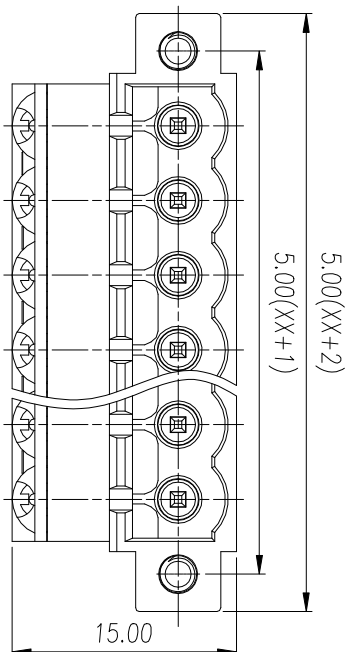

UL/CUL 技术参数		cULus			
UL/CUL Technical Data		B	C	D	
等级	Use Group	B	C	D	
额定电压	Rated Voltage	300	-	300	
额定电流	Rated Current	10	-	10	
接线范围	Wire Range	28-12			
单/多芯线	Solid/Stranded	AWG			
耐压	Withstanding Voltage	1600V/Min			
IEC 技术参数		IEC61984			
IEC Technical Data		IEC61984			
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	320	320	630	
额定电流	Rated Current	12	12	12	
额定冲击电压	Impulse withstand voltage	4.0	4.0	4.0	
导线截面积	Conductor cross section	0.2-2.5			
硬质/柔性导线	Solid/flexible	[mm ²]			
材料	Material	P466			
绝缘材料	Insulation Material	UL94V-0			
阻燃等级	Inflammability	铜合金			
导体材料	Contact Material	镀锡 Sn Plated			
导体表面镀层	Contactive Coating	-			
一般参数 Other Data					
间距	Pitch / 极数	Poles	[mm] / [P]	5.0/02-24	
剥线长度	Shipping Length		[mm]	7-8	
螺丝	Screw/扭矩	Torque(Max)	[N.m]	-	
工作温度	Operating temperature		[°C]	-40~105	
焊接温度	Soldering temperature			-	
引针/尺寸	Pin Dimensions		[mm]	-	
PCB板孔径	PCB Hole Diameter		[mm]	-	

linear dimension(Tolerances Standard GB/T 14486-2008)	—	□	⊥
tolerance	±0.20	±0.30	±0.50
variable range	6 to 10	10 to 30	30 to 60
tolerance	±0.30	±0.50	±0.70
variable range	6 to 10	10 to 30	30 to 60
tolerance	±0.50	±0.70	±1.00
variable range	6 to 10	10 to 30	30 to 60
tolerance	±1.00	±1.30	±1.60
variable range	6 to 10	10 to 30	30 to 60
tolerance	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	
名称 / TITLE	WJ2EDGKDRM-5.0-XXP-1YY-00A				版本 / REV	V0

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD