

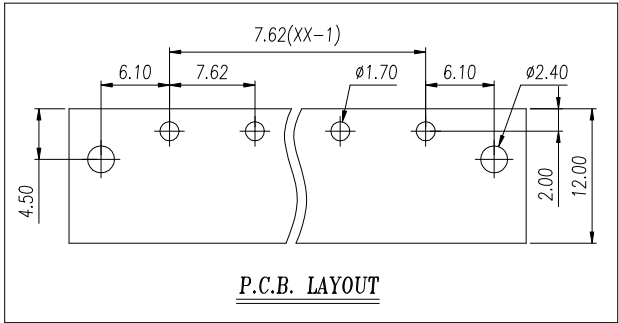
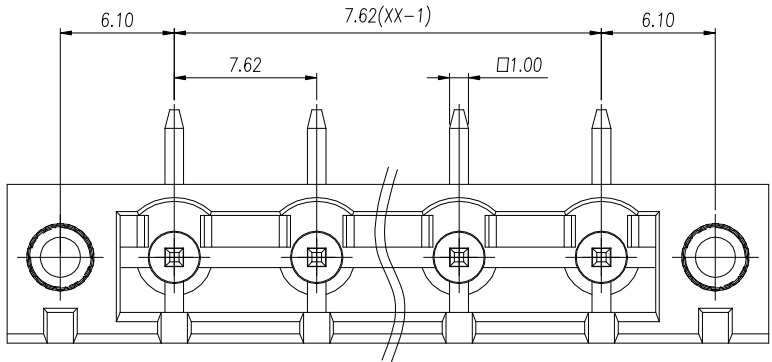


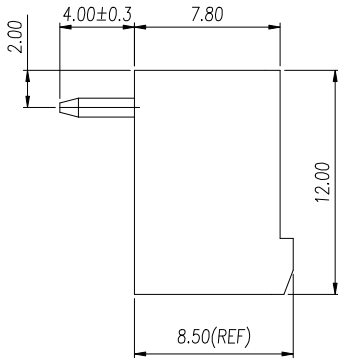

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

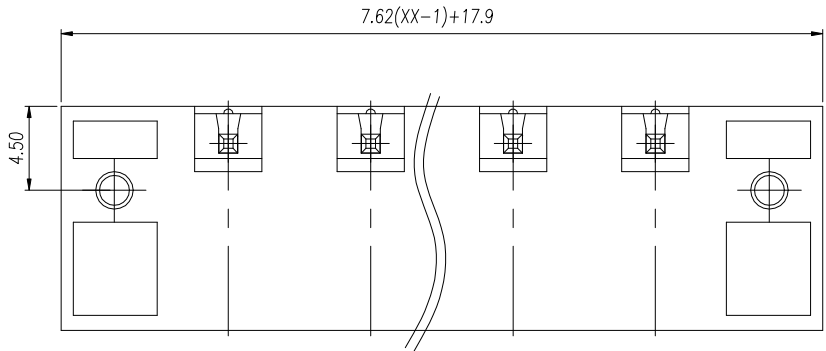

UL/CUL 技术参数 UL/CUL Technical Data					UL US	
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	15	-	10	
接线范围	Wire Range					
单/多芯线	Solid/Stranded	[AWG]	-			
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数 IEC Technical Data					D'E	
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	400	630	630	
额定电流	Rated Current	[A]	10	10	10	
额定冲击电压	Impulse withstand voltage	[KV]	6.0	6.0	6.0	
导线截面积	Conductor cross section					
硬质/柔性导线	Solid/flexible	[mm ²]	-			
材料					Material	
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflamability		UL94V-0			
导体材料	Contact Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀锡 Sn Plated			
一般参数					Other Data	
间距	Pitch /极数 Poles	[mm] / [P]	7.62 / 02~24			
剥线长度	Stripping Length	[mm]	-			
螺丝	Screw/扭矩 Torque(Max)	[N.m]	-			
工作温度	Operating temperature	[°C]	-40~105			
焊锡温度	Soldering temperature		260°C/5S			
引针尺寸	Pin Dimensions	[mm]	1.0*1.0			
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.7			

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 400	over 400 to 630	to 10	over 10 to 100	over 100 to 630
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	WJ2EDGRM-7.62-XXP-1YY-00A	